


Highdecks

113-320-960 PERFO

The 113-320-960 Perfo is a profiled and perforated steel sheet developed for flat roof constructions. This roof sheet can span over 6 meters under standard load, making it an ideal solution for industrial and tertiary projects. This steel deck sheet is available in various dimensions and versions. An interior coating can be optionally applied to the B-side.

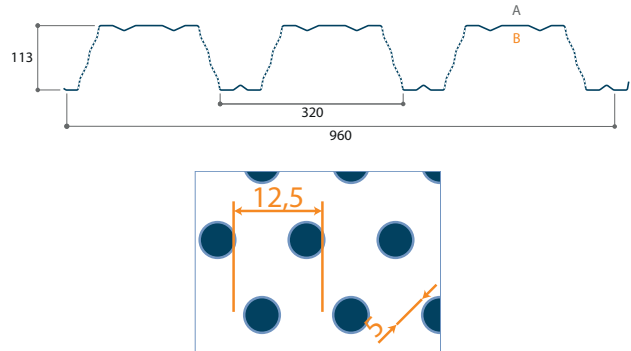

Product	Thickness (mm)	Weight (kg/m ²)
10272	0,75	8,64
10272	0,88	10,14
10272	1,00	11,52
10272	1,25	14,40

Technical characteristics

Standard length	from 1500 to 13500 mm
Effective width	960 mm
Type of metal	Steel S320 GD
Coatings	Interiorcoating 912 (15 μ), Galva according to color chart MR101_Colorflow
Perforation rate	15% (R5T12,5 O)

References

Galvanized steel	EN 10346:2015 - tolerances according to EN 10143:2006
Pre-painted steel	EN 10169:2022
Dimensions / Tolerances	EN 508-1:2021 (Geometry)
Static calculation	EN 1993-1-3:2006

Load tables (in kN/m²)

Static properties

tN [mm]	Weight (kg/m ²)	Top flange in compression						Bottom flange in compression				
		Mc,Rk,F [kNm/m]	Mc,Rk,B [kNm/m]	I _{eff} [cm ⁴ /m]	V _w ,Rk [kN/m]	R _w ,Rk,B [kN/m]	R _w ,Rk, A [kN/m]	Mc,Rk,F [kNm/m]	Mc,Rk,B [kNm/m]	I _{eff} [cm ⁴ /m]	V _w ,Rk [kN/m]	R _w ,Rk, A [kN/m]
0,75	8,64	8,82	8,42	179,43	21,46	18,34	5,46	8,42	8,82	182,97	21,46	21,46
0,88	10,14	10,84	10,19	209,69	33,81	26,36	7,93	10,19	10,84	216,46	33,81	33,81
1,00	11,52	12,97	11,64	237,11	48,60	33,62	10,21	11,64	12,97	247,38	48,60	48,60
1,25	14,40	17,29	14,67	297,88	77,12	50,96	15,73	14,67	17,29	311,76	77,12	77,12



Permissible downward load (kN/m²) for span (m)

Number of fields	Thickness (mm)	Span (m)														
		5,00	5,20	5,40	5,60	5,80	6,00	6,20	6,40	6,60	6,80	7,00	7,20	7,40	7,60	7,80
Single L/200	0,75	1,16	1,03													
	0,88	1,35	1,20	1,07												
	1,00	1,53	1,36	1,21	1,09											
	1,25	1,92	1,71	1,53	1,37	1,23	1,11	1,01								
Double L/200	0,75	1,46	1,40	1,35	1,30	1,26	1,21	1,17	1,12	1,06	1,01					
	0,88	2,11	2,03	1,91	1,81	1,71	1,61	1,50	1,41	1,33	1,25	1,18	1,09	1,01		
	1,00	2,60	2,44	2,29	2,16	2,04	1,92	1,80	1,69	1,59	1,46	1,34	1,23	1,14	1,05	
	1,25	3,53	3,30	3,10	2,92	2,74	2,56	2,40	2,21	2,01	1,84	1,69	1,55	1,43	1,32	1,22
Multi L/200	0,75	1,46	1,40	1,35	1,30	1,26	1,21	1,15	1,04							
	0,88	2,11	2,03	1,96	1,82	1,64	1,48	1,34	1,22	1,11	1,02					
	1,00	2,72	2,56	2,30	2,06	1,85	1,67	1,52	1,38	1,26	1,15	1,05				
	1,25	3,63	3,23	2,89	2,59	2,33	2,10	1,91	1,73	1,58	1,44	1,32	1,22	1,12	1,04	

The above load is the total load in Ultimate Limit State (UGT) divided by 1,5.
 minimum support widths: 40 mm for end supports - 160 mm for intermediate supports.
 The load tables are limited by a maintenance load of 1,00 kN/m² or 1,50 kN/m.



Permissible upward load (kN/m²) for span (m)

Number of fields	Thickness (mm)	Span (m)														
		5,00	5,20	5,40	5,60	5,80	6,00	6,20	6,40	6,60	6,80	7,00	7,20	7,40	7,60	7,80
Single L/150	0,75	1,57	1,40	1,25	1,12	1,01	0,91	0,83	0,75	0,68	0,63	0,57	0,53	0,49	0,45	0,41
	0,88	1,86	1,66	1,48	1,33	1,19	1,08	0,98	0,89	0,81	0,74	0,68	0,62	0,57	0,53	0,49
	1,00	2,13	1,89	1,69	1,51	1,36	1,23	1,12	1,01	0,93	0,85	0,78	0,71	0,66	0,61	0,56
	1,25	2,68	2,38	2,13	1,91	1,72	1,55	1,41	1,28	1,17	1,07	0,98	0,90	0,83	0,76	0,71
Double L/150	0,75	1,88	1,74	1,61	1,50	1,40	1,31	1,22	1,15	1,08	1,02	0,96	0,91	0,86	0,81	0,77
	0,88	2,31	2,14	1,98	1,84	1,72	1,61	1,50	1,41	1,33	1,25	1,18	1,12	1,06	1,00	0,95
	1,00	2,77	2,56	2,37	2,21	2,06	1,92	1,80	1,69	1,59	1,50	1,41	1,33	1,26	1,20	1,14
	1,25	3,69	3,41	3,16	2,94	2,74	2,56	2,40	2,25	2,12	1,99	1,88	1,78	1,68	1,60	1,52
Multi L/150	0,75	2,35	2,17	2,02	1,88	1,75	1,63	1,53	1,42	1,29	1,18	1,08	1,00	0,92	0,85	0,78
	0,88	2,89	2,67	2,48	2,30	2,15	2,01	1,85	1,68	1,53	1,40	1,28	1,18	1,09	1,00	0,93
	1,00	3,46	3,20	2,97	2,76	2,57	2,33	2,11	1,92	1,75	1,60	1,47	1,35	1,24	1,15	1,06
	1,25	4,61	4,26	3,95	3,61	3,25	2,94	2,66	2,42	2,21	2,02	1,85	1,70	1,56	1,44	1,34

The above load is the total load in Ultimate Limit State (UGT) divided by 1,5.
 Minimum support widths: 40 mm for end supports - 160 mm for intermediate supports